

ecom-UNO

DIFFERENTIAL PRESSURE METER

- Precise and fast differential pressure measurements to determine device connection pressure (flow pressure), nozzle pressure (flow pressure), gas pressure (system pressure) as well as static pressure
- Fits in any shirt pocket - small and compact
- Magnetic attachment on the back
- Four switchable units
- Includes batteries and protective pouch


Technical Data

- Free switch between four units (hPa, mmH₂O, PSI, mmHg)
- Measuring range: ± 200 hPa
- Resolution: 0.01 hPa
- Accuracy: 1%
- Overload: 300 hPa
- Power supply: 2 standard AA 1.5 V (Mignon) batteries

Dimensions (W x H x D) approx. 4 x 2.5 x 1 inc

Weight approx. .03 oz (includes batteries)

- Scope of delivery: ecom-UNO, batteries, protective pouch

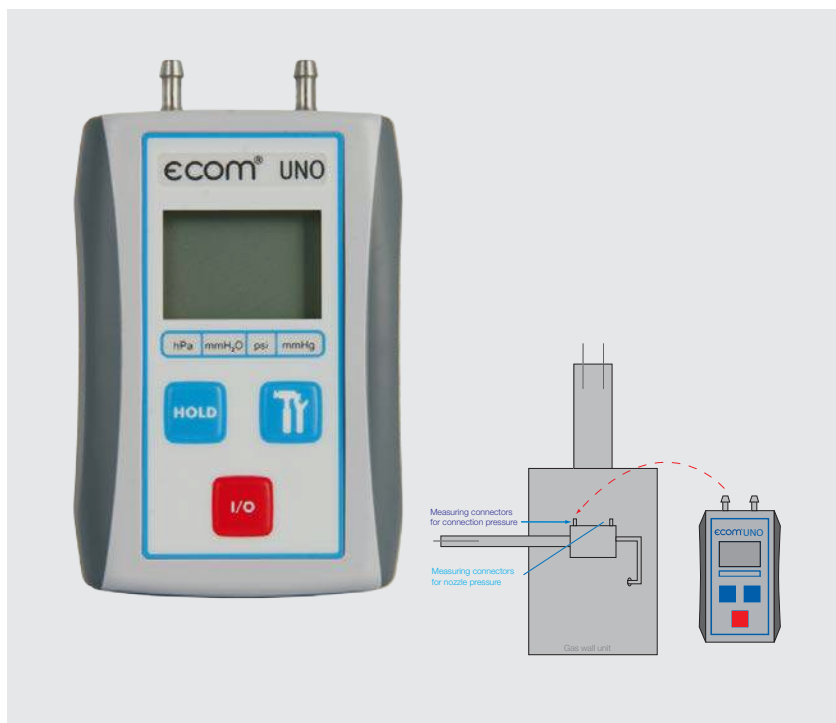

ecom-DP3

PRESSURE METER

- Fully automated pressure testings
- Internal pump for up to 1.5 bar pressurization (1500 hPa)
- Built-in thermal quick printer
- Fully automated leak rate determination in only a few minutes (does not require gas sampling)
- Instant usability check
- Safe, fully automated test routines
- for gas (TRGI), Liquefied gas (TRF), Water (TRWI) and waste water pipeline testing
- For additional measurements up to 40 bar (using external sensors)
- PC software included

Features

- Instrument in ultralight, durable aluminium housing
- Temperature monitoring (32-212°F with 32.01 °C resolution)
- Built-in thermal quick-printer for the documentation of safety-relevant checks (includes printer paper and replacement paper roll)
- High-quality rechargeable Lithium-Ion battery
- SD card for data storage (for easy PC backup)
- Hard-transport case made of durable plastic
- PC software on USB drive

Other Included Accessories

- Silicone tube (100 mm) with fast coupling for connection to the pressure test ports
- Tube (9 ft) with fast couplings
- Y-hose adapter
- Two cone-shaped test plugs (1/2" - 3/4" // 3/4" - 1 1/4")
- T-piece for overpressure valve with fast coupling
- Two high pressure test plugs (3/8" to 1/2" // 3/8" to 3/4") with fast coupling
- Shut-off valve, mini ball valve and fast coupling
- Single-tube meter cap
- T-piece for overpressure valve with fast coupling



Dimensions (W x H x D) 17 x 7 x 15 in

Weight approx. 18 lbs (includes accessories)